

# #12 Standard Drill Point Roofing Fastener



## Product Description

SHDS #12 Standard Drill Point Roofing Fastener are designed to secure insulation to 16-22 gauge steel and wood decks. The fastener must achieve a penetration depth of 3/4" minimum. The fastener is also available pre-assembled with 3" Galvanized Steel Insulation Plates. Pre-assembled insulation fasteners and plates are fast to install and increase productivity in the mechanical attachment of roof insulation boards.


## Features & Benefits

- Heavier shank and thread diameters than most standard roofing fasteners.
- Buttress thread design provides high pullout resistance.
- Sharp drill point for quick installation.

## Corrosion Resistance

- 1800 hrs salt spray NSS resistance tested by SGS, appearance rating above 10 (ASTM B117-18)
- 15 cycle Kesternich test, no red rust (GB 9789)
- 1500hr salt spray NSS resistance test, no red rust (GB/T 10125)

Length	Thread	PKG(QTY)	Weight
1-5/8"-41mm	Full	1000	13lbs (6.14kg)
2-1/4"-57mm	Full	1000	17lbs (7.99kg)
2-7/8"-72mm	Full	1000	21lbs (9.69kg)
3"-76mm	Full	1000	23lbs (10.40kg)
3-1/4"-83mm	3" (75mm)	1000	24lbs (10.86kg)
3-3/4"-95mm	3" (75mm)	1000	28lbs (12.70kg)
4-1/2"-114mm	3" (75mm)	1000	31lbs (14.29kg)
5"-125mm	3" (75mm)	1000	34lbs (15.55kg)
6"-152mm	4" (102mm)	1000	42lbs (18.96kg)
7"-178mm	4" (102mm)	500	24lbs (11.05kg)
8"-200mm	4" (102mm)	500	28lbs (12.5kg)

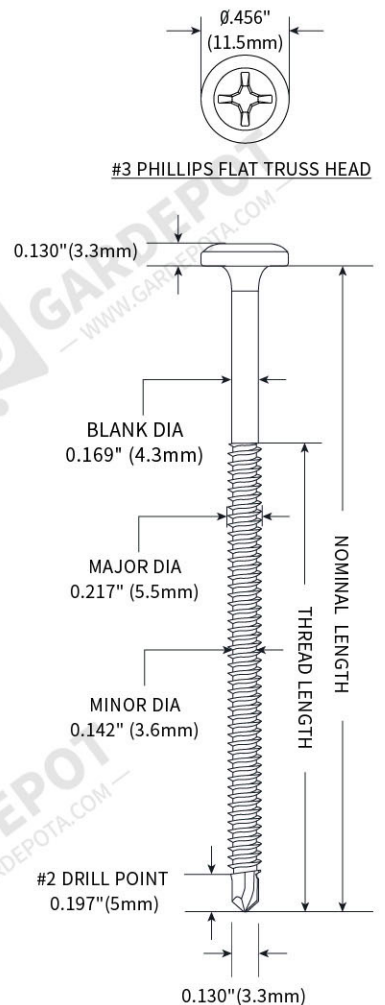

Roofing material  
supplier

# #14 Heavy Duty Roofing Fastener



## Product Description

SHDS ##14 Heavy Duty Roofing Fastener are designed to secure insulation to 16-22 gauge steel and wood decks. The fastener must achieve a penetration depth of 3/4" minimum. The fastener is also available pre-assembled with 3" Galvanized Steel Insulation Plates. Pre-assembled insulation fasteners and plates are fast to install and increase productivity in the mechanical attachment of roof insulation boards.


## Features & Benefits

- Heavier shank and thread diameters than most standard roofing fasteners.
- Buttress thread design provides high pullout resistance.
- Sharp drill point for quick installation.


## Corrosion Resistance

- 1800 hrs salt spray NSS resistance tested by SGS, appearance rating above 10 (ASTM B117-18)
- 15 cycle Kesternich test, no red rust (GB 9789)
- 1500hr salt spray NSS resistance test, no red rust (GB/T 10125)

Length	Thread	PKG(QTY)	Weight
1-1/4"-32mm	Full	1000	13lbs (5.9kg)
1-1/2"-38mm	Full	1000	16lbs (7.1kg)
2"-50mm	Full	1000	19lbs (8.8kg)
3"-75mm	Full	1000	27lbs (12.5kg)
4"-100mm	3" (75mm)	1000	37lbs (16.6kg)
5"-125mm	4" (102mm)	1000	45lbs (20.49kg)
6"-150mm	4" (102mm)	1000	54lbs (24.39kg)
7"-178mm	4" (102mm)	500	32lbs (14.3kg)
8"-200mm	4" (102mm)	500	36lbs (16.4kg)
9"-228mm	4" (102mm)	500	39lbs (17.6kg)
10"-254mm	4" (102mm)	500	41lbs (18.6kg)
11"-280mm	4" (102mm)	250	24lbs (10.7kg)
12"-304mm	4" (102mm)	250	26lbs (11.6kg)

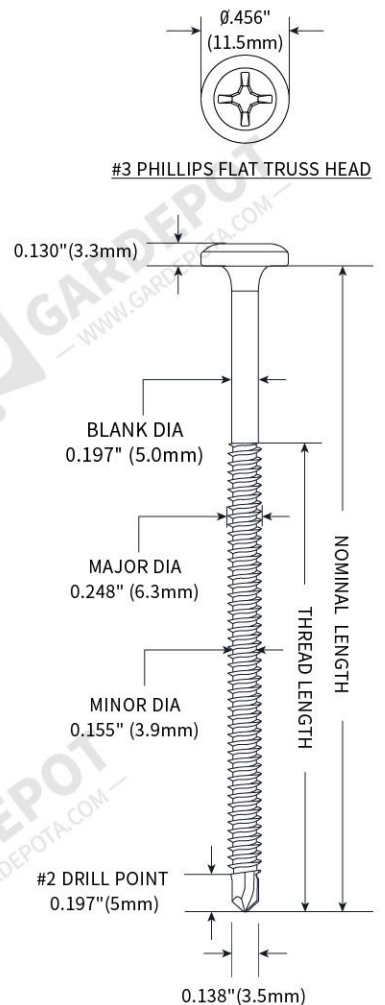

# #15 Extra Heavy Duty Roofing Fastener

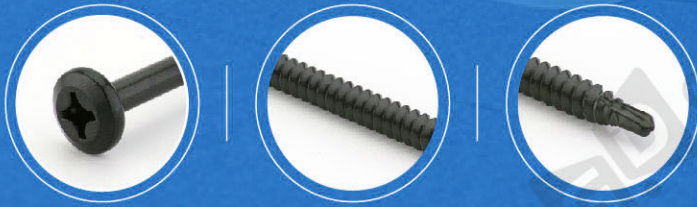

## Product Description

SHDS #15 Extra Heavy Duty Roofing Fasteners are designed to secure insulation to 16-22 gauge steel and wood decks. The fastener must achieve a penetration depth of 3/4" minimum. The fastener is also available pre-assembled with 3" Galvanized Steel Insulation Plates. Pre-assembled insulation fasteners and plates are fast to install and increase productivity in the mechanical attachment of roof insulation boards.

## Features & Benefits

- Heavier shank and thread diameters than most standard roofing fasteners.
- Buttress thread design provides high pullout resistance.
- Sharp drill point for quick installation.

## Corrosion Resistance

- 1800 hrs salt spray NSS resistance tested by SGS, appearance rating above 10 (ASTM B117-18)
- 15 cycle Kesternich test, no red rust (GB 9789)
- 1500hr salt spray NSS resistance test, no red rust (GB/T 10125)

Length	Thread	PKG (QTY)	Weight
1-1/4"-32mm	Full	1000	18lbs (8.2kg)
2"-50.8mm	Full	1000	21lbs (9.5kg)
3"-76.2mm	Full	1000	30lbs (13.8kg)
4"-101.6mm	3" (75mm)	1000	40lbs (18kg)
5"-127.1mm	4" (102mm)	500	26lbs (11.66kg)
6"-152.4mm	4" (102mm)	500	29lbs (13.3kg)
7"-177.8mm	4" (102mm)	500	34lbs (15.5kg)
8"-203.2mm	4" (102mm)	500	39lbs (17.5kg)
9"-228.6mm	4" (102mm)	500	46lbs (21kg)
10"-254.0mm	4" (102mm)	500	51lbs (23.16kg)
11"-279.4mm	4" (102mm)	250	30lbs (13.8kg)
12"-304.8mm	4" (102mm)	250	33lbs (15kg)
14"-355.6mm	4" (102mm)	250	39lbs (17.5kg)
16"-406.4mm	4" (102mm)	250	44lbs (19.9kg)
18"-457.2mm	4" (102mm)	250	49lbs (22.4kg)
20"-508mm	4" (102mm)	250	55lbs (24.8kg)
22"-558.8mm	4" (102mm)	250	60lbs (27.3kg)
24"-609.6mm	4" (102mm)	250	66lbs (29.8kg)

